

Dahua IPカメラ
フリッカー対策の設定
ミカサ商事株式会社

WEB5.0画面

PCからカメラへログイン


Microsoft Edgeを起動してください。

URL入力画面にカメラのIPアドレス（初期は192.168.1.108）を入力し、エンターキーを押します。
ログイン画面が表示されるので、ユーザー名とパスワードを入力し、ログインしてください。



カメラのホーム画面

ホーム画面は中央にライブ映像が表示されます。
”家のアイコン”をクリックします。

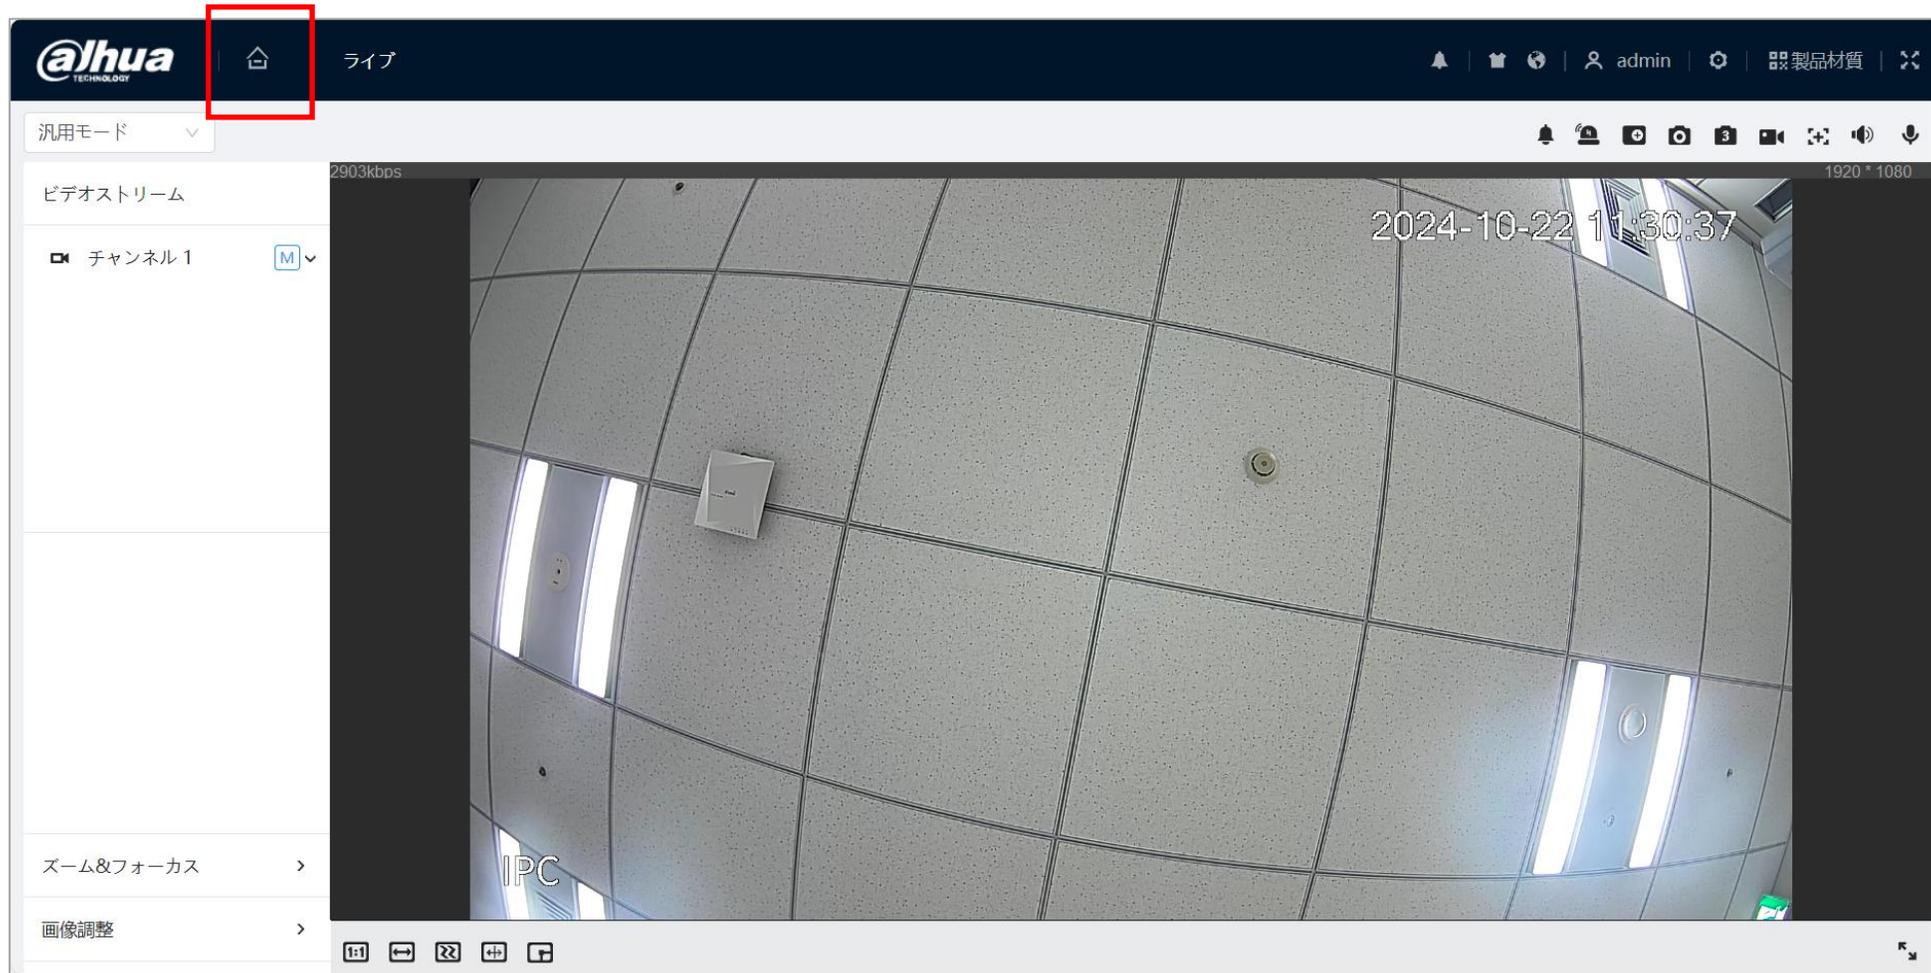

シャッター速度の設定①

「カメラ」をクリックします。



ライブ

ライブビデオを表示。



AI

AI機能を設定してください。



カメラ

画像属性、音声およびビデオのコーディング設定。



イベント

一般イベント設定。



システム

ユーザ管理、デバイスの操作とメンテナンス。



録画

録画したビデオを設定、検索、および再生します。

シャッター速度の設定②

「画像」 > 「露光」に移動します。

The screenshot shows the Dahua camera web interface. The top navigation bar includes the Dahua logo, a home icon, and labels for 'ライブ' (Live) and 'カメラ' (Camera). On the right, there are notification, search, and user icons, with the user name 'admin' displayed. A left sidebar contains menu items: '画像' (Image), 'イコド' (Icon), and '音声' (Audio). The '画像' menu item is highlighted with a red box. The main content area shows the '動作モード' (Action Mode) section with three radio buttons: '自己適応' (Self-adapt), '昼/夜切替' (Day/Night Switch), and 'カスタマイズされたシーン' (Customized Scene), with the last one selected. Below this is a live video feed of a hallway with a timestamp '2025-12-24 15:29:55'. To the right of the video is a settings panel. The 'プロファイル' (Profile) is set to '日中' (Day). Under the '画像' (Image) sub-section, the '露光' (Exposure) menu item is highlighted with a red box. Other settings include 'AI SSA', '逆光' (Backlight), 'WB', '昼/夜' (Day/Night), 'イルミネーター' (Illuminator), '震除去' (Vibration Removal), 'LDC', '明滅防止' (Flicker Prevention) set to '屋外' (Outdoor), 'モード' (Mode) set to '自動' (Auto), '露光補正' (Exposure Correction) slider at +50, 'オートアイリス' (Auto Iris) and '3D NR' (3D Noise Reduction) toggles turned on, and '3D NRレベル' (3D NR Level) and '2D NRレベル' (2D NR Level) sliders both at +50. At the bottom, there is a 'タイムプラン設定' (Time Plan Setting) dropdown and three buttons: '適用' (Apply), 'リフレッシュ' (Refresh), and '初期設定' (Reset).

シャッター速度の設定③

例えば、「明滅防止」を「60Hz」で、「シャッター」を「1/60」にし、「適用」をクリックします。ライブ映像を確認し、フリッカーが改善したか確認してください。

プロファイル 日中

AI SSA

画像

露光

逆光

WB

昼/夜

イルミネーター

霞除去

LDC

明滅防止 60Hz

モード 手動

シャッター 1/60

ゲイ 0 - 50 (0-100)

露光補正 - +50

オートア...

3D NR

明滅防止 屋外

モード 屋外

露光補正 50Hz

60Hz

シャッター 1/60

ゲイ 1/120

露光補正 1/60

オートア... 1/30

1/12

3D NR 1/6

3D NRレ... 1/4

* 推奨

周波数50Hzのエリアはシャッター速度1/50

周波数60Hzのエリアはシャッター速度1/60